



A high-magnification micrograph of a sample surface. The image shows a complex, multi-layered structure with various circular features and a central, darker, irregular area, likely representing laser-induced damage or a crater.

Laser-Induced Damage Threshold (LIDT) Measurement Report

Damage Certification Test

Sample: Sample #2,2

Request from:

ALTECHNA Co.Ltd.
Mokslininku st. 6A
LT-08412 Vilnius

Contact person:

Remigijus Šliūpas

Testing institute:

Lidaris Ltd.
Saulėtekio al. 10,
LT-10223, Vilnius, Lithuania, EU

Tester/date:

E. Pupka / 2014-04-29

Specimen

Name of sample:

Sample #2,2;

Type of specimen:

Glass, HR Dielectric Coating;

Storage, cleaning:

Plastic box, dust blow off by compressed air;

Test specification

Second harmonic of pulsed Nd:YAG InnoLas Laser: SpitLight Hybrid laser ($\lambda = 532$ nm, linear polarization, pulse duration 5.2 ns), $\lambda/2$ plate combined with additional polarizer attenuator, online scattered light damage detection, offline inspection of damage detection using Nomarski microscopy (100x).

Laser parameters

Wavelength:

532 nm;

Angle of incidence:

0 deg;

Polarisation state:

linear;

Pulse repetition frequency:

50 Hz;

Spatial beam profile in target plane:

TEM_{00} ;

Longitudinal beam profile:

Single mode (SLM);

Beam diameter in target plane_(1/e²):

197.98 μm (average from 64 pulses);

Pulse duration:

5.2 ns;

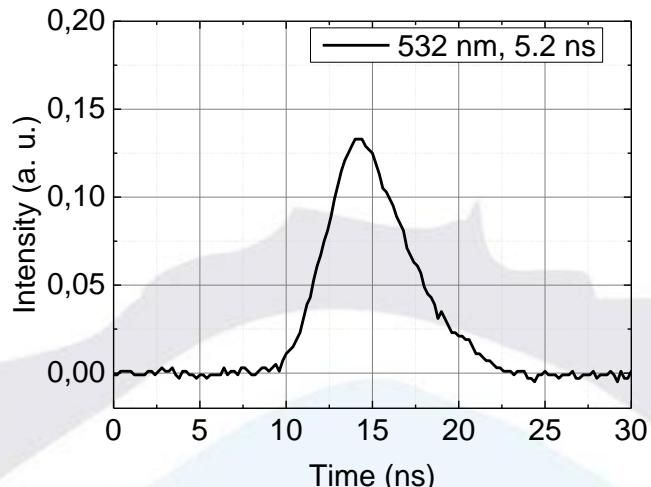
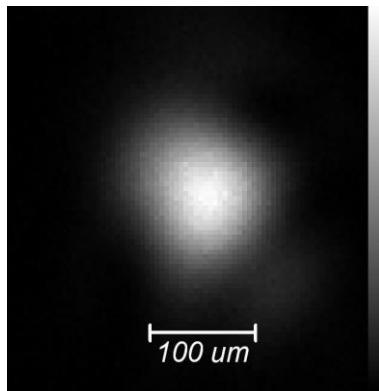


Fig 1 Spatial beam profile in target plane (left) and oscilloscope trace (right)

Test procedure:

Number of sites per specimen:

444;

Arrangement of test sites:

Equally spaced;

Minimum distance between sites:

800 μm ;

Damage detection:

Scattered light diode;

Storage of the specimen:

Optical paper, plastic box;

Test environment:

Industrial environment;

Cleaning:

Compressed air;

Definition of LIDT:

Nonlinear fit to 0% of damage probability;

S-on-1 test

Test result:

Table 1 Summarized LIDT's for sample #2,2;

| Test mode | Threshold, J/cm ² |
|-----------|------------------------------|
| 1-on-1 | 10.0 ≤ 11.4 ≤ 12.9 |
| 1000-on-1 | 7.8 ≤ 9.0 ≤ 10.1 |

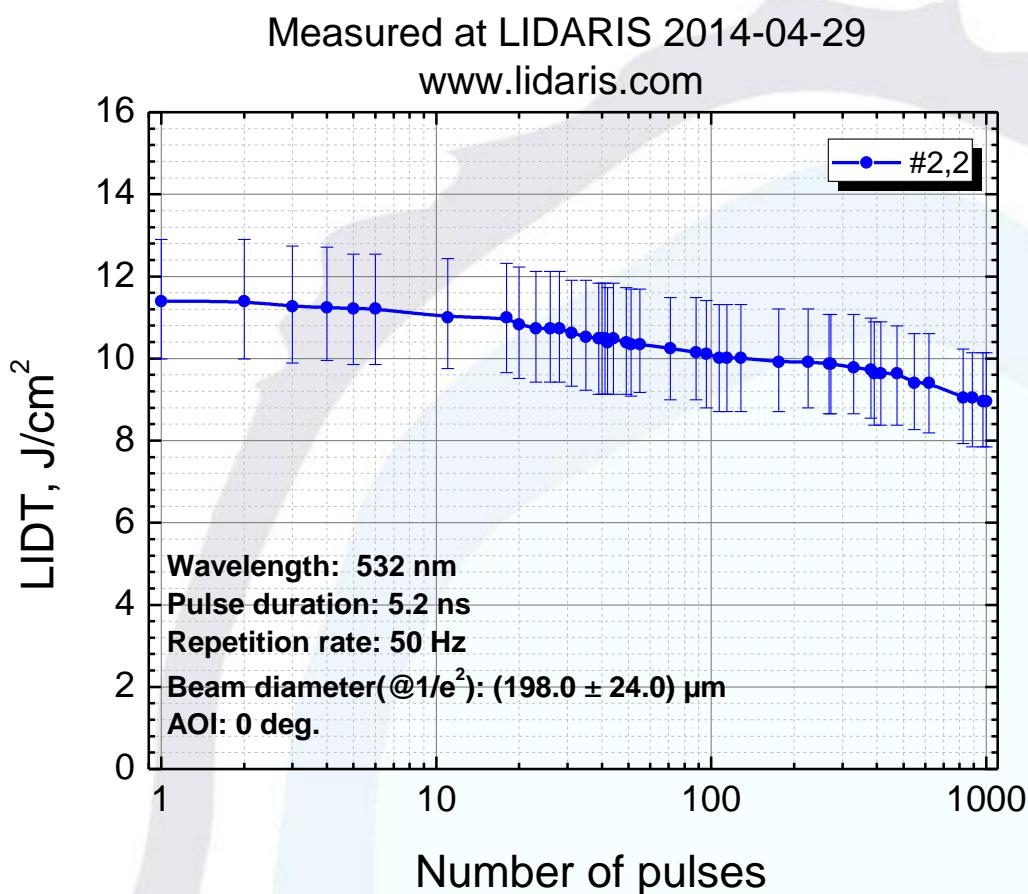
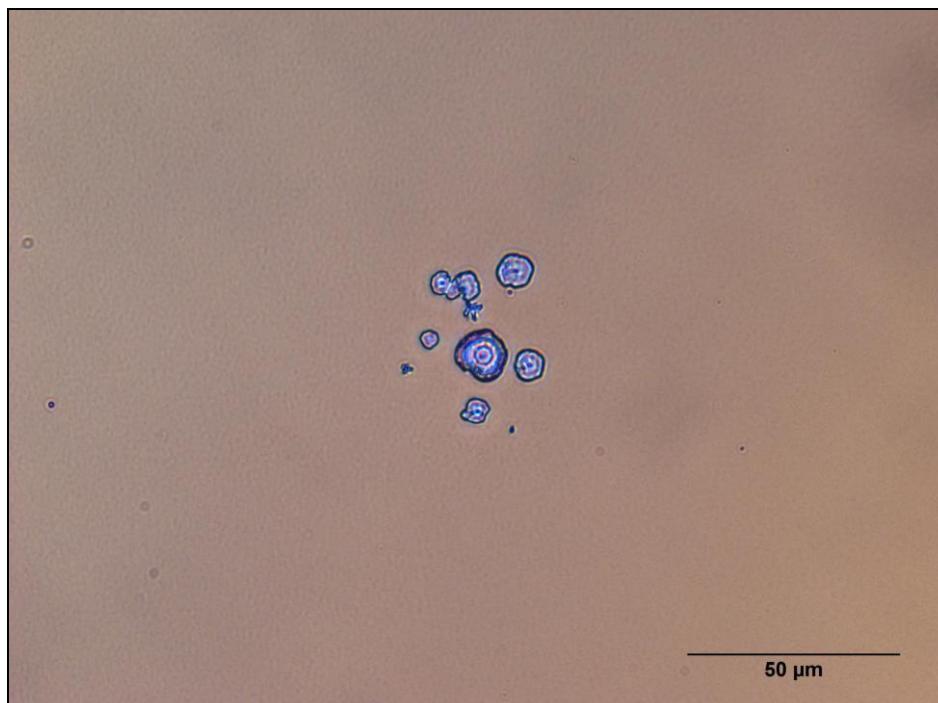
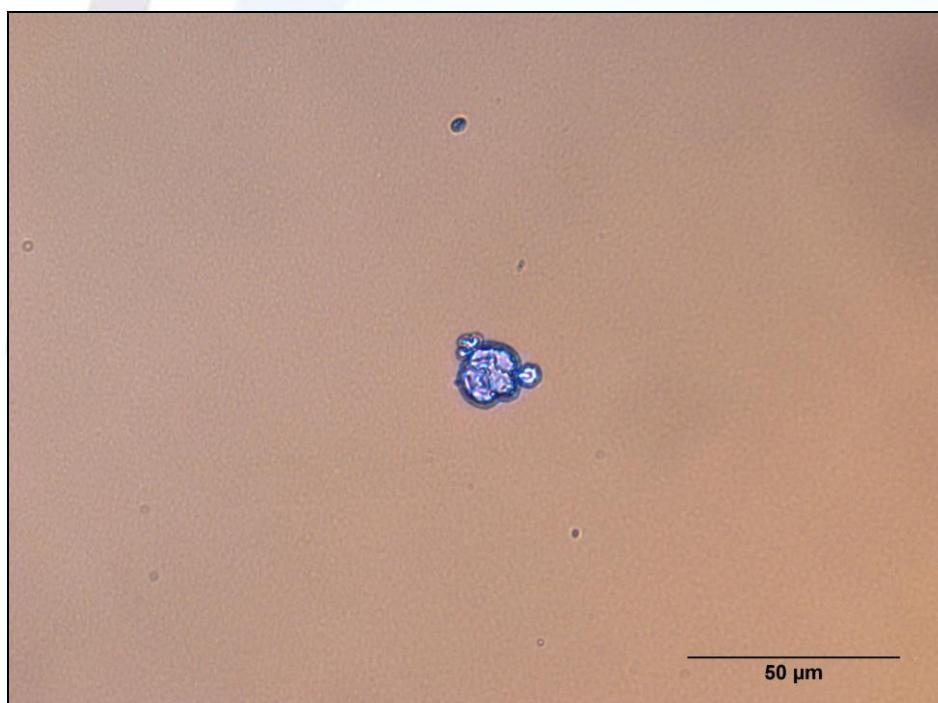


Fig. 2.

Typical damage morphology:



**Fig. 3 Typical front surface damage morphology
(Energy density 7.91 J/cm², damage after 1 pulse)**



**Fig. 4 Typical front surface damage morphology
(Energy density 14.65 J/cm², damage after 825 pulses)**