

SO2271



# LASER-INDUCED DAMAGE THRESHOLD (LIDT) MEASUREMENT REPORT

S-ON-1 (ISO 21254-2)  
TEST PROCEDURE

Sample: 72668 kaitintas

---

## Request from

---

Address	Altechna Mokslininku st. 6A 08412 Vilnius Lithuania
Contact person	Aurelija Vasiljeva
Inquiry ID	1385
Purchase order	PU0020630-AVA

---

## Testing institute

---

Address	UAB Lidaris Saulėtekio al. 10 10223 Vilnius Lithuania
Tester	Lina Vigriceite
Test date	10/02/2021
Sale order	SO2271
Test ID	EQ2WZY

---


## Specimen

---

Name	72668 kaitintas
Type	HR Dielectric Coating (HR (Rs>99,9%, Rp>99,7%) @ 343-355 nm, AOI 45°)
Dimensions	Ø25.4 x 5.0 mm
Packaging	Plastic box

# TEST EQUIPMENT

## Test setup

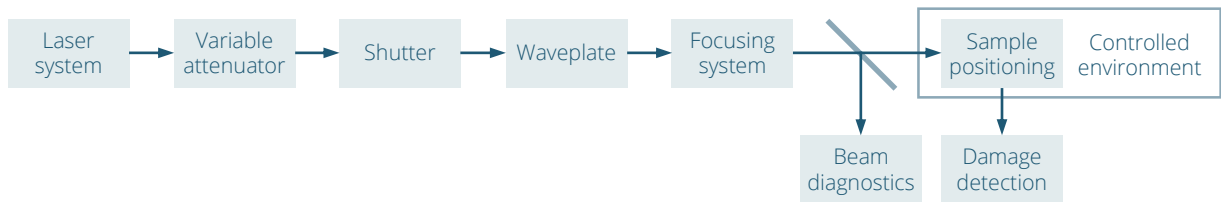

## Laser and its parameters

Type	Q-switched, seeded Nd:YAG
Manufacturer	InnoLas Laser II
Model	SpitLight Hybrid
Central wavelength	355.0 nm
Angle of incidence	45.0 deg
Polarization state	Linear P
Pulse repetition frequency	10 Hz
Spatial beam profile in target plane	TEM00
Beam diameter in target plane ( $1/e^2$ )	$(225.8 \pm 2.5) \mu\text{m}$
Longitudinal pulse profile	Single longitudinal mode
Pulse duration (FWHM)	$(5.4 \pm 0.3) \text{ ns}$
Pulse to pulse energy stability (SD)	0.9 %

## Energy/power meter

Manufacturer	Ophir
Model	PE50-DIF-C
Calibration due date	2021-06-01

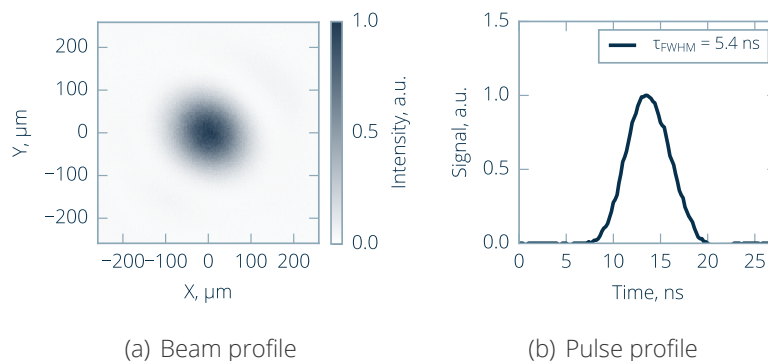


Figure 1. Laser parameters used for measurements.

---

# TEST SPECIFICATION

---

## Definitions and test description

---

Laser-induced damage (LID) is defined as any permanent laser radiation induced change in the characteristics of the surface/bulk of the specimen which can be observed by an inspection technique and at a sensitivity related to the intended operation of the product concerned. Laser-induced damage threshold (LIDT) is defined as the highest quantity of laser radiation incident upon the optical component for which the extrapolated probability of damage is zero.<sup>1</sup>

LID of the sample is investigated by performing a standardized S-on-1 test procedure.<sup>2</sup> LIDT value is determined by fitting experimental damage probability data with a model derived for a Poisson damage process assuming degenerate defect ensemble.<sup>3</sup>

---

## Test sites

---

Number of sites	207
Arrangement of sites	Hexagonal
Minimum distance between sites	750 µm
Maximum pulses per site	1000

---

## Analysis information

---

Online detection	Scattered light diode
Offline detection	Nomarski microscope
Software version	7957275 - 53e7367

---

## Test environment

---

Environment	Air
Cleanroom class (ISO 14644-1)	ISO7
Pressure	1 bar
Temperature	21.5 - 22.1 C
Humidity	11.6 - 13.0 %

---

## Sample preparation

---

Storage before test	Normal laboratory conditions
Dust blow-off	Compressed air
Cleaning	Isopropanol

---

<sup>1</sup>ISO 21254-1:2011: Lasers and laser-related equipment - Test methods for laser-induced damage threshold - Part 1: Definitions and general principles, International Organization for Standardization, Geneva, Switzerland (2011)

<sup>2</sup>ISO 21254-2:2011: Lasers and laser-related equipment - Test methods for laser-induced damage threshold - Part 2: Threshold determination, International Organization for Standardization, Geneva, Switzerland (2011)

<sup>3</sup>J. Porteus and S. Seitel, Absolute onset of optical surface damage using distributed defect ensembles, Applied Optics, 23(21), 3796-3805 (1984)

# LIDT TEST RESULTS

## LIDT VALUE

$10^3$ -on-1	$3.38^{+0.27}_{-0.72} \text{ J/cm}^2$
--------------	---------------------------------------

## CHARACTERISTIC DAMAGE CURVE

Table 1: Estimated LIDTs from fitting model for sample 72668 kaitintas.

Test mode	Threshold (Offline detection - microscopy)	Threshold (Online detection - scattering)
10-on-1	-	$6.75^{+0.87}_{-1.18} \text{ J/cm}^2$
$10^2$ -on-1	-	$6.75^{+0.53}_{-1.18} \text{ J/cm}^2$
$10^3$ -on-1	$3.38^{+0.27}_{-0.72} \text{ J/cm}^2$	$6.71^{+0.53}_{-1.18} \text{ J/cm}^2$


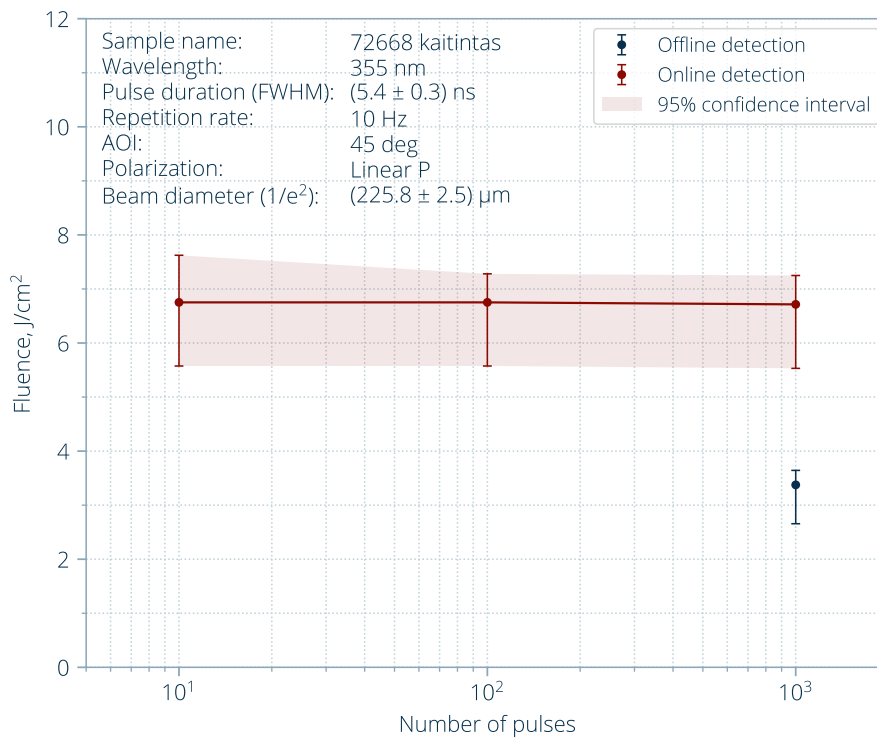


Figure 2. Characteristic damage curve.

## DAMAGE PROBABILITY (OFFLINE DETECTION)

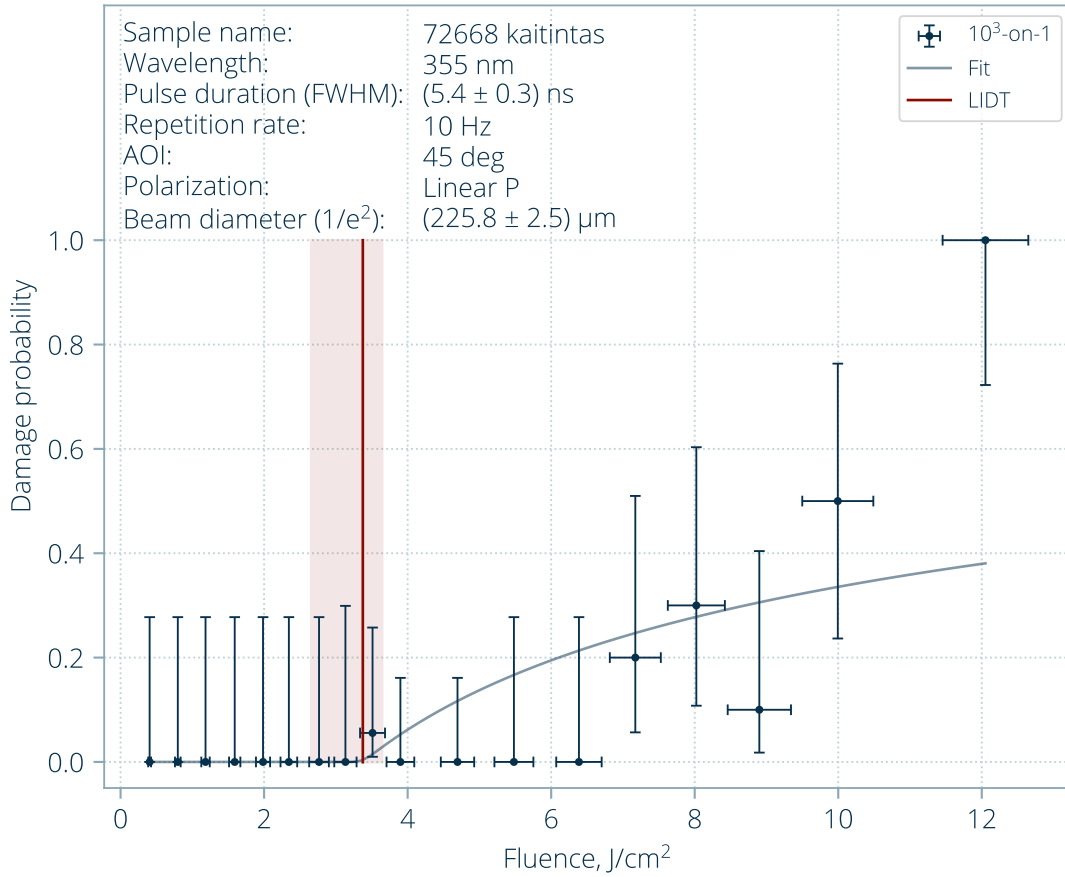

(a)  $10^3$ -on-1

Figure 3. Damage probability plot.

## TYPICAL DAMAGE MORPHOLOGY (OFFLINE DETECTION)

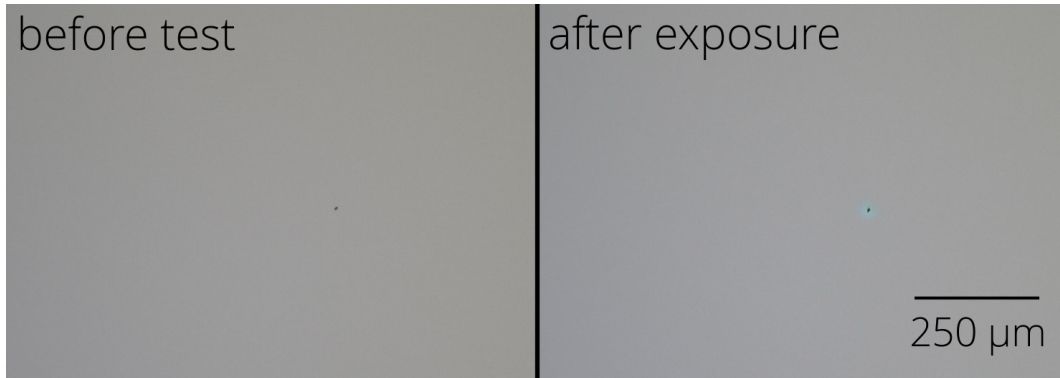
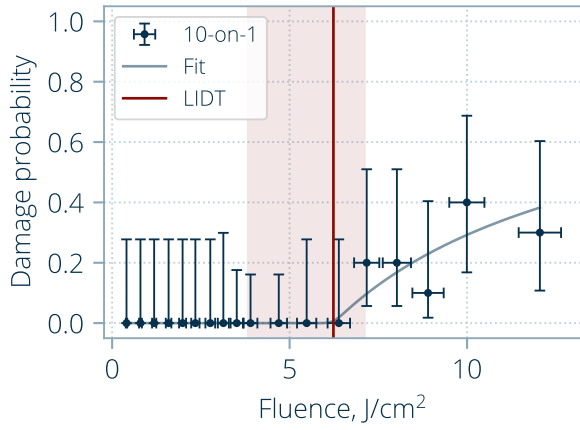


Figure 4. Typical damage morphology: fluence  $3.54 \text{ J/cm}^2$ , damage after 698 pulse(s).

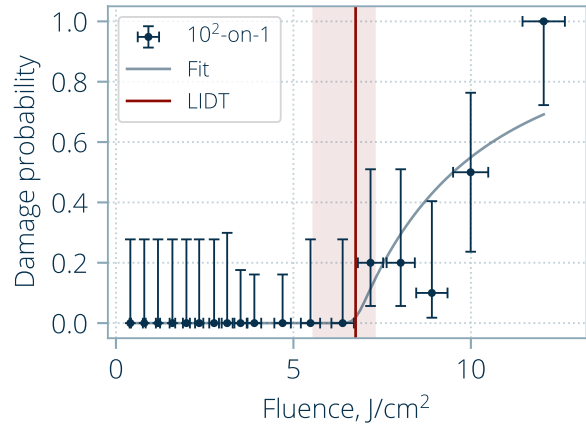


Figure 5. Typical damage morphology: fluence  $12.1 \text{ J/cm}^2$ , damage after 28 pulse(s).


## DAMAGE PROBABILITY (ONLINE DETECTION)



(a) 10-on-1



(b) 10<sup>2</sup>-on-1

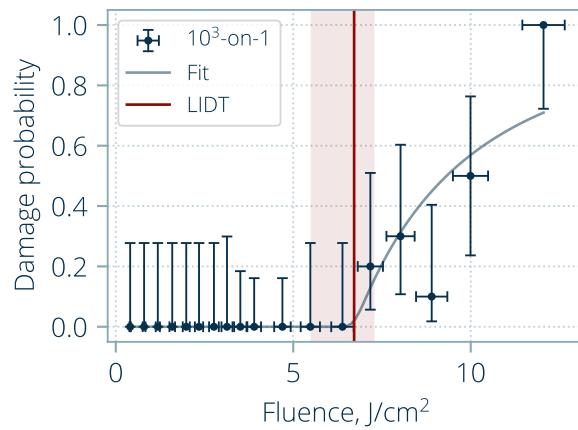

(c) 10<sup>3</sup>-on-1

Figure 6. Damage probability plots.

# TECHNICAL NOTES

## TECHNICAL NOTE 1: Oblique incidence

According to the ISO 21254-2:2011 standard, for spatial beam profiling perpendicular to the direction of beam propagation and angles of incidence differing from 0 degrees, the cosine of the angle of incidence is included in the calculation of the effective area, which leads to correct evaluation of laser fluence at different angles of incidence (Figure 7).

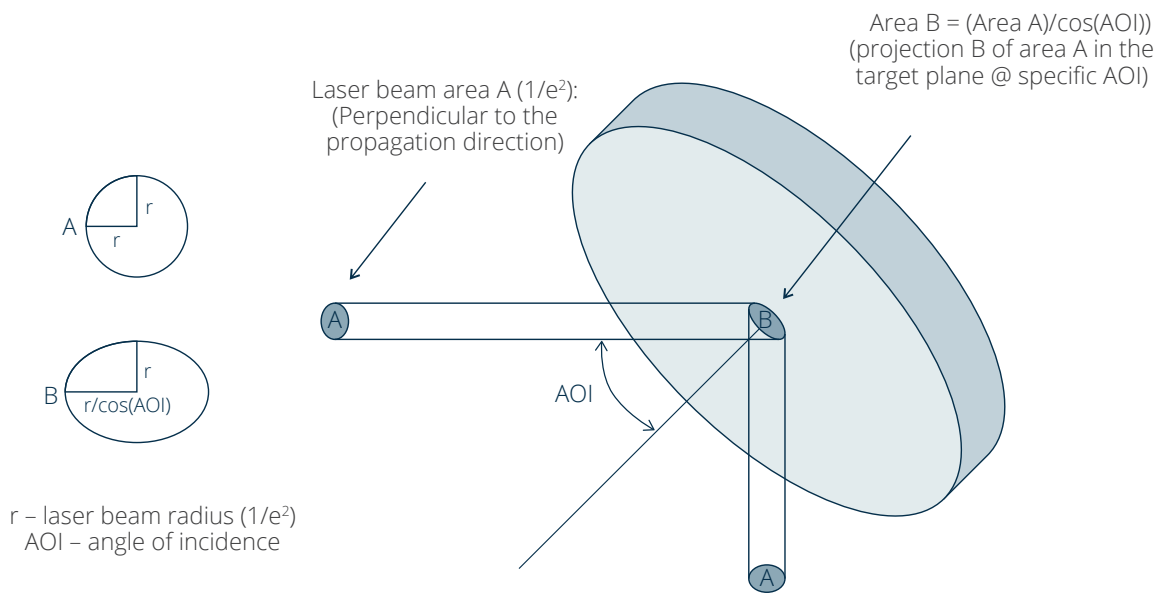


Figure 7. Oblique incidence.